

KCE-DI1255

GIMBAL DOME CAMERA with Built-in Fixed Lens



Function


- 1/3" 960H Sony EXview HAD II CCD
- 0.1Lux at F1.2
- High Resolution 700TV Line
- 6mm Fixed Lens
- Anti- IR Saturation
- IP66
- 3-Axis Structure Function

Specification

DESCRIPTION	NTSC	PAL
Imaging Sensor	1/3" 960H Sony EXview HAD II CCD	
Effective Pixels	976(H) x 494(V)	976(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	700TV Lines(Max)	
Video Output	CVBS : 1.0Vp-p, 75Ω composite	
S/N (Y Signal)	52dB (AGC off)	
Min. Illumination	0.1Lux at F1.2	
Lens	6mm Fixed Lens	
Electronic Shutter	Auto (1/60~1/10,000sec)	Auto (1/50~1/10,000sec)
Backlight Compensation	Auto	
White Balance	ATW	
Auto Gain Control	Auto	
Day&Night	Auto	
IR LED	55EA	
Input Voltage	DC 12V(±10%) / AC 24V Dual Voltage(Optional)	
Power Consumption	IR OFF : 170mA(MAX) / IR ON : 650mA at DC 12V POWER IR OFF : 250mA(MAX) / IR ON : 650mA at AC 24V POWER	
Operating Temp./Hum.	-10℃~+50℃ / 30% ~ 80% RH	
Storage Temp./Hum.	-20℃~+60℃ / 20% ~ 90% RH	

Dimension

Unit : mm

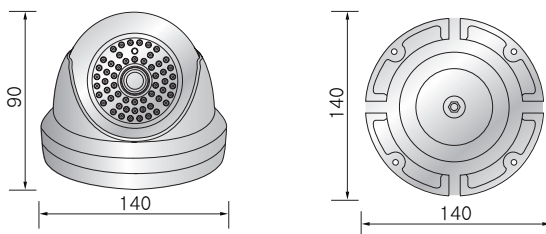

Option

